

Tinytag Plus 2 Temperature Logger For PT100 Probe (-50 to +300/600°C)

TGP-4104

Issue 4
8th December 2006
E&OE

The workhorse of the Gemini range the Tinytag Plus 2 data loggers are housed in robust, waterproof (IP68) rated cases that are designed for use in harsh and outdoor applications.

Tinytag Plus 2 data loggers have a high reading accuracy and resolution, large memories, a fast offload speed and a low battery monitor.

The TGP-4104 uses an external probe (not included) to record in high temperature applications.

Popular Applications

- Food processing and storage
- Pharmaceutical manufacture
- Logistics monitoring



Features

- High temperature recorder
- 32,000 reading capacity
- High accuracy
- High reading resolution
- Fast data offload
- Robust, waterproof case
- Low battery monitor
- User-replaceable battery





Features


Total Reading Capacity	32,000 readings
Memory type	Non Volatile
Trigger Start	Magnetic Switch
Delayed Start	Relative / Absolute (up to 45 days)
Stop Options	When full After n Readings Never (overwrite oldest data)
Reading Types	Actual, Min, Max
Logging Interval	1 sec to 10 days
Offload	While stopped or when logging in minutes mode
Alarms	2 fully programmable; latching

Reading Specification

Reading Range	-50°C to 600°C (-58°F to +1112°F)
Sensor Type	PT100 (external probe)
Reading Resolution	0.02°C or better
Temperature Stability	±0.015°C/°C change from 25°C

Accuracy

The graph below is the accuracy of the TGP-4104 when used with a PB-6005-1M5/3M or PB-6006-1M5/3M probe. Using a different probe may effect the accuracy of the unit.

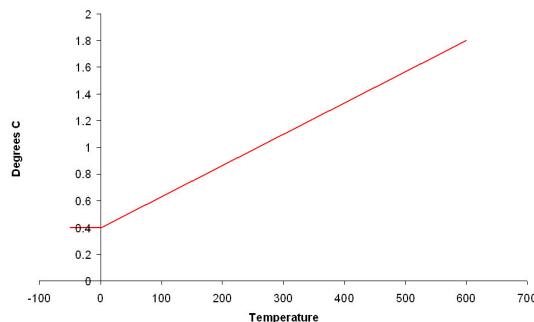

Physical Specification

IP Rating	IP68 water-proof (see notes)
Operational Range*	-40°C to +85°C (-40°F to +185°F)
Case Dimensions	
Height	34mm / 1.34"
Width	59mm / 2.32"
Depth	80mm / 3.15"
Weight	110g / 3.9oz

*The Operational Range indicates the physical limits to which the unit can be exposed, not the reading range over which it will record.

Notes

Battery Type SAFT LS14250 or LST14250; Tekcell SBAA02P

The logger will operate with other ½AA 3.6V Lithium (Li-SOCI2) batteries but performance cannot be guaranteed.

Replacement Interval Annually

Before replacing the battery the data logger must be stopped.

Data stored on the logger will be retained after a battery is replaced.

If used at low temperatures the data logger should be allowed to warm to room temperature before it is opened to avoid condensation forming inside the unit.

The IP68 rating is valid only when the unit's connector cap and probe are fitted and is valid to a depth of 15m (50ft).

Calibration

This unit is configured to meet Gemini's quoted specification during its manufacture.

We recommend that the calibration of this unit should be checked annually against a calibrated reference meter.

A UKAS traceable certificate of calibration can be supplied for an additional charge either at the point of purchase, or if the unit is returned for a service calibration.

Approvals

This equipment complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause any harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation.

This product is manufactured by Gemini Data Loggers (UK) Ltd to BS EN ISO9001:2000 (Certificate No. 6134) and is approved to EN61326:1998 with any standard leads or probes supplied.



Required and Related Products

To use this data logger you will also require:

A probe:

PB-6005-1M5/3M: PT100 Probe for use with TGP-4104 (-50 to +300°C) or
PB-6006-1M5/3M: High Temperature PT100 Probe for use with TGP-4104 (-50°C to +600°C)

The following software:

SWCD-0040: Tinytag Explorer software (version 4.2 or above recommended).

and a

CAB-0007: Tinytag PC Serial Download Cable or
CAB-0007-USB: Tinytag USB Download Cable

Further related products:

SER-9530: Tinytag Plus/IS Service Kit
ACS-6000: Trigger Start Magnet